




# Installation Instructions for **Solid Back Shade MR16**

### **IMPORTANT INFORMATION**

- This product is ETL listed for indoor dry locations.


#### **SAVE THESE INSTRUCTIONS!**



### **Install the Accessory Shade in Chopper type Fixtures**


1718 W. Fullerton Ave


Chicago, IL 60614 Tel: 773-770-1195 Fax: 773-935-5613 www.edgelighting.com info@edgelighting.com

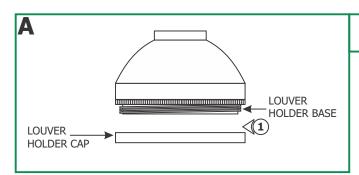

1: Unscrew and remove the louver holder cap from the louver holder base.


- 2: Place the MR16 lamp into the louver holder base.
- **3:** Place a hexcell louver (Optional) or a glass lens (Optional) or a combination of a hexcell louver and a glass lens on the front of MR16 lamp.
- **4:** Replace and tighten the louver holder cap to the louver holder base.

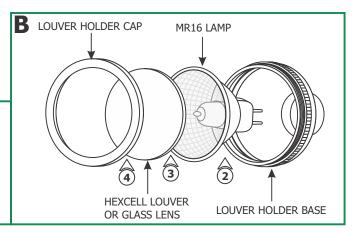

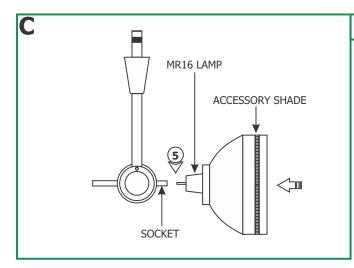


5: Push the lamp pins completely into the socket holes.


# **Install the Accessory shade in Vespa type MR16 Sockets**

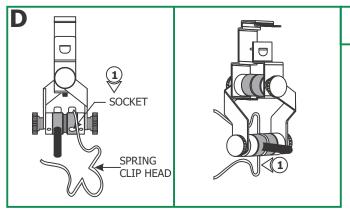

**1:** Push the spring clip completely onto the center of the socket groove until it snaps into place.

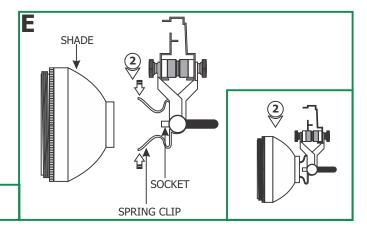

**2:** Squeeze the spring clip ends while inserting it into the shade.



- 3: Push the lamp pins completely into the socket holes.
- **4:** Place a hexcell louver (Optional) or a glass lens (Optional) or a combination of a hexcell louver and a glass lens on the front of MR16 lamp.
- **5:** Replace and tighten the louver holder cap to the louver holder base.