

PARTS AND TECHNICAL INFORMATION



END CONNECTOR

The End Connector electrically connects 12 or 24 volt 10 gauge wires from a transformer to the end of a Monorail section. For Adjustable End Connector see p. 54.

	SYSTEM	TYPE	FINISH
ORDERING CODE	MC	ME	SN
	MC Monorail Connector M2C Monorail Connector	ME Male End	SN Satin Nickel PN Polished Nickel BZ Antique Bronze



MONORAIL CEMENT BRICK ANCHORS

Secure Monorail Standoffs to cement or brick surfaces. Package includes ten anchors.

	SYSTEM	TYPE
ORDERING CODE	MS	CBA
	MS Monorail standoff	CBA Cement Brick Anchor



PLUG AND CORD

To power a Remote Transformer from a standard 120 volt outlet, connect the Plug and Cord to the 120 volts wires of transformer. Includes a 10 ft. cord with in-line switch.

	TYPE	LENGTH	COLOR
ORDERING CODE	PC	10	BK
	PC Plug and Cord	10 10'	BK Black

CANOPIES WITHOUT TRANSFORMERS

Order transformers separately on pg. 56.



	SYSTEM	CANOPY	FINISH
ORDERING CODE	FJC	4RD	SN
	FJC Fast Jack Canopy	2SQ 2.78" Square 4RD 4.6" Round 4SQ 4.6" Square	SN Satin Nickel PN Polished Nickel BZ Antique Bronze WH White



DIMMERS AND DIMMING COILS

All Edge Lighting transformers can be dimmed. Transformers are dimmed on the primary side of the transformer. Low voltage magnetic dimmers are used with magnetic transformers. Low voltage electronic dimmers are used with electronic transformers. When using magnetic low voltage dimmers with magnetic transformers, there is a possibility of transformer buzz. Surface mounted magnetic transformers include an integral dimming coil in the housing. If a remote magnetic transformer controlled by a magnetic dimmer buzzes excessively, add a de-buzzing dimming coil (sold separately as shown below) in series to the hot wire.

	TYPE	WATTAGE
ORDERING CODE	TDB	150
	TDB Transformer Debuzzing Coil	150 150 300 300 600 600

HOW TO BEND MONORAIL




BEND RAIL BY HAND

Monorail is easily hand-bendable. It bends to a 9" radius. Tighter bends available for special custom orders.

- To bend Monorail free-style, center the bending point on Monorail between both hands as far apart as possible moving them close together as bending progresses and the desired shape is achieved.
- When bending the Monorail against a rigid form such as plywood, always use a form about 20% smaller than the desired curve to compensate the Monorail spring-back. Hold one end of the Monorail against the form then progress along the rail while bending to follow shape.


SOFT STRIP SPECIAL USE PRODUCTS

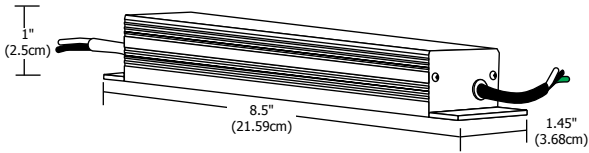

30 WATT 12 VOLT DC POWER SUPPLY:

LED power supplies transform and regulate power from a line voltage power source into low voltage power for use with **LED** lighting. The PS-30W-12VDC power supply accepts input voltage ranging from 100-130 volts AC and outputs 12 volt DC power up to 30 watts.


ORDERING CODE	PRODUCT	WATTAGE	VOLTAGE
PS	PS	30W	12VDC
PS	Power Supply	30W 30 Watt	12VDC 12 Volt DC

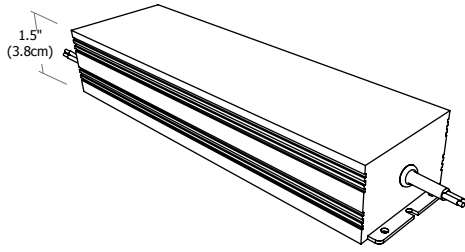

60 WATT 12 VOLT DC POWER SUPPLY:

LED power supplies transform and regulate power from a line voltage power source into low voltage power for use with **LED** lighting. The PS-60W-12VDC power supply accepts input voltage ranging from 100-240 volts AC and outputs 12 volt DC power up to 60 watts.

ORDERING CODE	PRODUCT	WATTAGE	VOLTAGE
PS	PS	60W	12VDC
PS	Power Supply	60W 60 Watt	12VDC 12 Volt DC

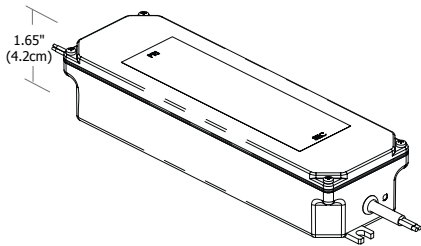

100 WATT 12 VOLT DC POWER SUPPLY:

LED power supplies transform and regulate power from a line voltage power source into low voltage power for use with **LED** lighting. The PS-100W-12VDC power supply accepts input voltage ranging from 100-277 volts AC and outputs 12 volt DC power up to 100 watts.

ORDERING CODE	PRODUCT	WATTAGE	VOLTAGE
PS	PS	100W	12VDC
PS	Power Supply	100W 100 Watt	12VDC 12 Volt DC



SS-CGF



SS-CGF-RGB

STRAIGHT GOOF CONNECTOR:

Use Goof Connectors to correct some installation errors. If a segment of Soft Strip is accidentally cut, the straight goof connectors may rejoin segments in some cases.

ORDERING CODE	PRODUCT	TYPE	CONNECTOR
SS	SS	CGF	Leave Blank for WW or VW
SS	Soft Strip	CGF Straight Goof Connector	RGB RGB



SS-CGF-3



SS-CGF-3-RGB

3 INCH FLEXIBLE GOOF CONNECTOR:

Use Goof Connectors to correct some installation errors. If a segment of Soft Strip is accidentally cut, the flexible goof connectors can rejoin segments with a 3 inch flexible cable between strips.

ORDERING CODE	PRODUCT	TYPE	SIZE	CONNECTOR
SS	SS	CGF	3IN	Leave Blank for WW or VW
SS	Soft Strip	CGF Flexible Goof Connector	3IN 3 Inch	RGB RGB