





MIRROR


The Edge Lighting mirror collection features integrated lighting that complements any bathroom space. The provided 3000K warm white color temperature renders the space and the user in just the right light. Warmer color temperatures can be achieved with an optional 2500K Filter.

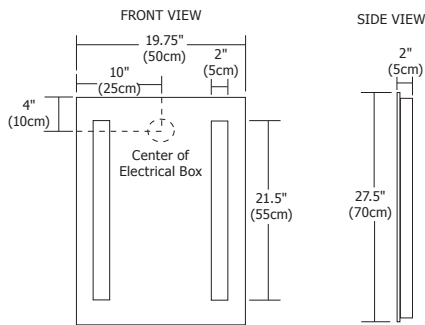


Twin Slim surface mounted rectangular mirror features vertical integral fluorescent lamps set behind frosted panels, projecting an even glow of light. ADA compliant.

DIFFUSER	Frosted Glass
BODY FINISH	Mirror
LAMP SPECIFICATION	Fluorescent (F1 or F1D) (Included)  F1 Only (p. 171) F1/F1D - 2xT5HO/G5/24W 3000K - 82CRI
TOTAL WATTAGE	F1/F1D - 48W
DIMMER	Fluorescent (F1) - Electronic Ballast; not Dimmable Fluorescent (F1D) - Electronic Ballast; Dimmable with standard incandescent dimmer <i>*Lutron® dimmer required - Nova (NFTU-5A), Diva (DVFTU-5A3P) or Skylark (SFTU-5A3P) recommended. For additional dimmers visit www.advancetransformer.com/uploads/resources/EL-2100-AB-R01.pdf</i>
COLOR CORRECTION FILTER	#T5x2-22-25K (p. 171) A pair of 20" long 25K sleeve filters.


ORDERING CODE	TWINSLIM	SIZE	LAMP	COLOR TEMPERATURE	VOLTAGE
		20 20"	F1 Fluorescent F1D Fluorescent Dimmable	No Filter (leave blank) 25K 2500K Filter	Standard 120V (leave blank) 2 230V 50Hz (F1 only) 3 277V 60Hz

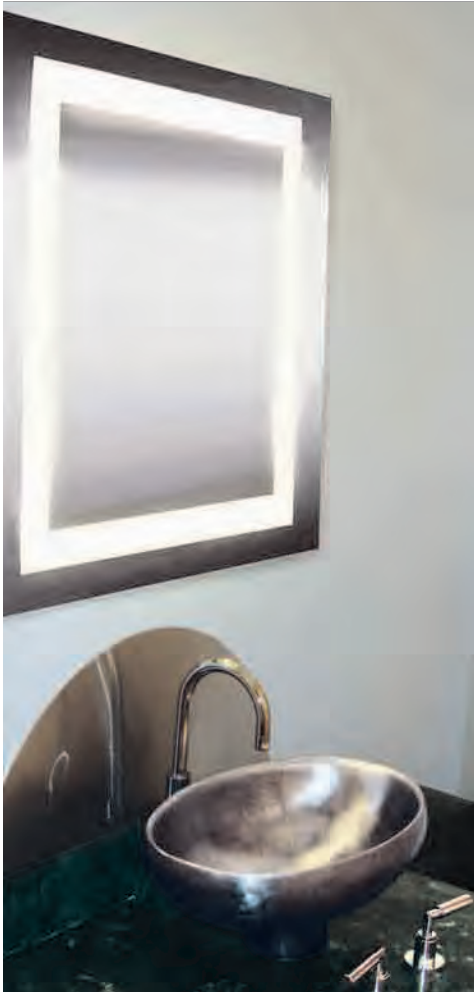


PLAZA SMALL 

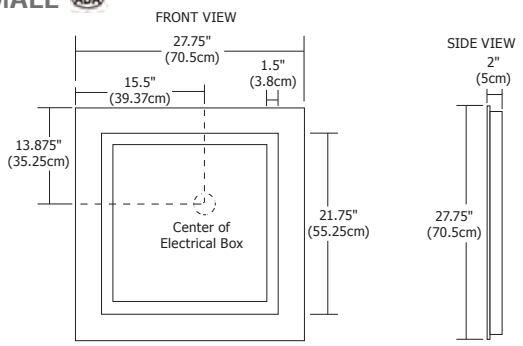

Plaza Small surface mounted square mirror features four integral fluorescent lamps set behind an inset square border of frosted glass projecting an even glow of light. ADA compliant.

DIFFUSER	Frosted Glass
BODY FINISH	Mirror
LAMP SPECIFICATION	Fluorescent (F1 or F1D) (Included)  F1 Only F1/F1D - 4xT5/2G11/55W 3000K - 82CRI
TOTAL WATTAGE	F1/F1D - 220W
DIMMER	Fluorescent (F1) - Electronic Ballast; not Dimmable Fluorescent (F1D) - Electronic Ballast; Dimmable with standard incandescent dimmer <i>*Lutron® dimmer required - Nova (NFTU-5A), Diva (DVFTU-5A3P) or Skylark (SFTU-5A3P) recommended. For additional dimmers visit www.advancetransformer.com/uploads/resources/EL-2100-AB-R01.pdf</i>
COLOR CORRECTION FILTER	#T12X4-22-25K

ORDERING CODE	PLAZA	DESCRIPTION	LAMP	COLOR TEMPERATURE	VOLTAGE
		S Small	F1 Fluorescent F1D Fluorescent Dimmable	No Filter (leave blank) 25K 2500K Filter	Standard 120V (leave blank) 2 230V 50Hz (F1 only) 3 277V 60Hz

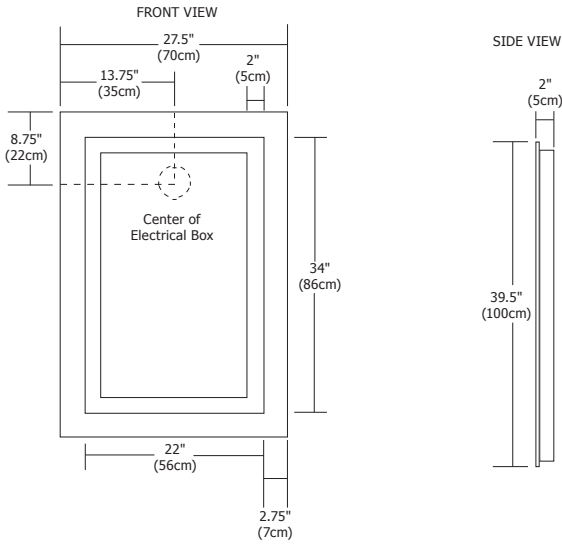

Plaza Large surface mounted rectangular mirror features four integral fluorescent lamps set behind an inset rectangle border of frosted glass projecting an even glow of light. ADA compliant.

DIFFUSER	Frosted Glass
BODY FINISH	Mirror
LAMP SPECIFICATION	Fluorescent (F1 or F1D) (Included) F1/F1D - 2xT5HO/G5/24W + 2xT5HO/G5/39W 3000K - 82CRI
TOTAL WATTAGE	F1/F1D - 126W
DIMMER	Fluorescent (F1) - Electronic Ballast; not Dimmable Fluorescent (F1D) - Electronic Ballast; Dimmable* <i>*Lutron® dimmer required - Nova (NF-10) or Diva (DVF-103P) recommended For additional dimmers visit www.lutron.com/instructions/030408.pdf</i>
COLOR CORRECTION FILTER	#T5X2-34-25K + #T5X2-22-25K (p. 171)

ORDERING CODE	DESCRIPTION	LAMP	COLOR TEMPERATURE	VOLTAGE
PLAZA	L	F1	No Filter (leave blank)	Standard 120V (leave blank)
	L Large	F1 Fluorescent F1D Fluorescent Dimmable	25K 2500K Filter	2 230V 50Hz (F1 only) 3 277V 60Hz