FAST JACK MULTI-PORT CANOPIES

REV.01.20.12

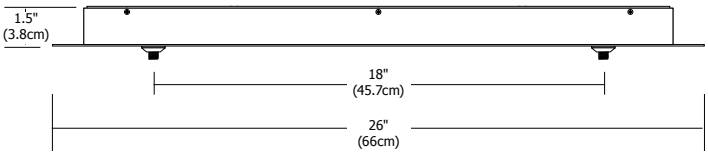

2 Port Linear Canopy

The 26" linear 2 port Fast Jack canopy mounts to a standard 4" electrical box with plaster ring or an octagon box. Maximum 75 watt load per port (total of 150 watts for halogen) or 60 watt load per port (total of 120 watts for LED). Halogen version is dimmable with electronic low voltage dimmer. **LED** dimming range varies: reference corresponding fixture specification sheets, at www.edgelighting.com, for dimming details.

Weight:
7 lb (3.2kg)

System		Canopy		Type		Ports		Finish		Voltage Input
FJP	–	**26RE**	–	Halogen (leave blank)	–	**2**	–	**SN**	–	Standard 120V (leave blank)
FJP Fast Jack Power Feed		**26RE** 26" Rectangle		**LED** LED		**2** 2 Ports		**SN** Satin Nickel **PN** Polished Nickel **BZ** Antique Bronze		**2** 230V 50Hz **3** 277V 60Hz (Halogen only)

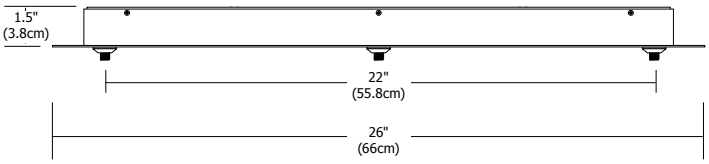

3 Port Linear Canopy

The 26" linear 3 port Fast Jack canopy mounts to a standard 4" electrical box with plaster ring or an octagon box. Maximum 75 watt load per port (total of 225 watts for halogen) or 60 watt load per port (total of 180 watts for LED). Halogen version is dimmable with electronic low voltage dimmer. **LED** dimming range varies: reference corresponding fixture specification sheets, at www.edgelighting.com, for dimming details.

Weight:
8 lb (3.2kg)

System		Canopy		Type		Ports		Finish		Voltage Input
FJP	–	**26RE**	–	Halogen (leave blank)	–	**3**	–	**SN**	–	Standard 120V (leave blank)
FJP Fast Jack Power Feed		**26RE** 26" Rectangle		**LED** LED		**3** 3 Ports		**SN** Satin Nickel **PN** Polished Nickel **BZ** Antique Bronze		**2** 230V 50Hz **3** 277V 60Hz (Halogen only)

PROJECT:

FIXTURE TYPE:

DATE:

1718 W. Fullerton Ave. Chicago, IL 60614 P: 773.770.1195 F: 773.935.5613 www.edgelighting.com

Edge LIGHTING