



SS3-24V-\_-WW

LENGTH IN FEET	TOTAL WATTAGE
1	4W
2	7W
3	11W
4	14W
5	18W
6	21W
7	25W
8	28W
9	32W
10	35W
11	39W
12	42W
13	46W
14	49W
15	53W
16	56W
17	60W
18	63W
19	67W
20	70W
21	74W
22	77W
23	81W
24	84W
25	88W

**Description:**

LED Soft Strip is a 1/2" wide flexible copper strip coated with a thin layer of protective silicone gel. Soft Strip is sold in 1 ft increments up to 25 ft with an easy-plug connector on each end. Includes a 6 ft power feed cable. Smaller segments are available in 4 inch increments (sold separately). Custom shapes can be created by plugging in flexible or angle connectors. Custom lengths can be made either by joining small segments or easily trimming Soft Strip with scissors (once trimmed, no additional segments may be added). At only 3.5 watts per foot, each foot of SS3 Soft Strip contains 18 warm or very warm white LEDs. It is securely installed to most surfaces using industrial grade 3M double stick tape located on the backside or may be installed with screw-in mounting clips (sold separately). 24 volt Soft Strip works with 100, & 200 watt power supplies. Dimmable with a 0-10V controller. Soft Strip is designed for indoor, open air environments.

**Applications:**

Indoor Only - Under/above cabinet, cove lighting or accent toe kicks  
For outdoor applications, see Soft Strip exterior spec sheet

**Lamp:**

18 warm white LEDs per foot  
Consumes 3.5 watts per foot @24VDC  
18" from counter produces 55 foot candles

**Average Lamp Life:**

50,000 hours

**Power Supply:**

100W- 24VDC **PSB-100W-010-24VDC**  
200W- 24VDC **PSB-200W-010-24VDC**

**Dimming:**

Lightolier 0-10V #ZP600FAM120W

**Mounting Strap:**

Straps for mounting SS1 and SS3 Soft Strip on surfaces not compatible with 3M tape (provided on the back of Soft Strip).

**SS-SU** U-Strap, Use every 6 to 12 inches. (30 to a bag with #6 1/2 wood screws).

**SS-ST** Screw Mount Cable Tie Strap, may be used for extra support (30 screws and straps per package).

**SS3-MCL** Screw In Mounting Clip, mounts beneath strip for added support (10 clips and screws and straps per package).



SS3-24V-4IN-\_  
4 Inch Soft Strip

Ordering Code	Voltage	Length	Color Temperature																																																						
<b>SS3</b>	<b>24V</b>	<b>10</b>	<b>WW</b>																																																						
SS3 Soft Strip 3.5W per Ft	24V 24 Volt	<table border="1"> <tr> <td>4IN</td><td>4"</td> <td>9</td><td>9'</td> <td>18</td><td>18'</td> </tr> <tr> <td>1</td><td>1'</td> <td>10</td><td>10'</td> <td>19</td><td>19'</td> </tr> <tr> <td>2</td><td>2'</td> <td>11</td><td>11'</td> <td>20</td><td>20'</td> </tr> <tr> <td>3</td><td>3'</td> <td>12</td><td>12'</td> <td>21</td><td>21'</td> </tr> <tr> <td>4</td><td>4'</td> <td>13</td><td>13'</td> <td>22</td><td>22'</td> </tr> <tr> <td>5</td><td>5'</td> <td>14</td><td>14'</td> <td>23</td><td>23'</td> </tr> <tr> <td>6</td><td>6'</td> <td>15</td><td>15'</td> <td>24</td><td>24'</td> </tr> <tr> <td>7</td><td>7'</td> <td>16</td><td>16'</td> <td>25</td><td>25'</td> </tr> <tr> <td>8</td><td>8'</td> <td>17</td><td>17'</td> <td></td><td></td> </tr> </table>	4IN	4"	9	9'	18	18'	1	1'	10	10'	19	19'	2	2'	11	11'	20	20'	3	3'	12	12'	21	21'	4	4'	13	13'	22	22'	5	5'	14	14'	23	23'	6	6'	15	15'	24	24'	7	7'	16	16'	25	25'	8	8'	17	17'			<b>WW</b> Warm White (3,000K) <b>VW</b> Very Warm (2,700K)
4IN	4"	9	9'	18	18'																																																				
1	1'	10	10'	19	19'																																																				
2	2'	11	11'	20	20'																																																				
3	3'	12	12'	21	21'																																																				
4	4'	13	13'	22	22'																																																				
5	5'	14	14'	23	23'																																																				
6	6'	15	15'	24	24'																																																				
7	7'	16	16'	25	25'																																																				
8	8'	17	17'																																																						

PROJECT:

FIXTURE TYPE:


DATE:



**Application:** 0-10V dimming for (1) 25 foot run of **SS3-25-24V-WW**

**Power Supply:** **PSB-100W-010-24VDC** max 100 watt

**Dimmer:** Lightolier Sunrise Preset Wall Mounted 0-10V Controller **#ZP600FAM120-W**

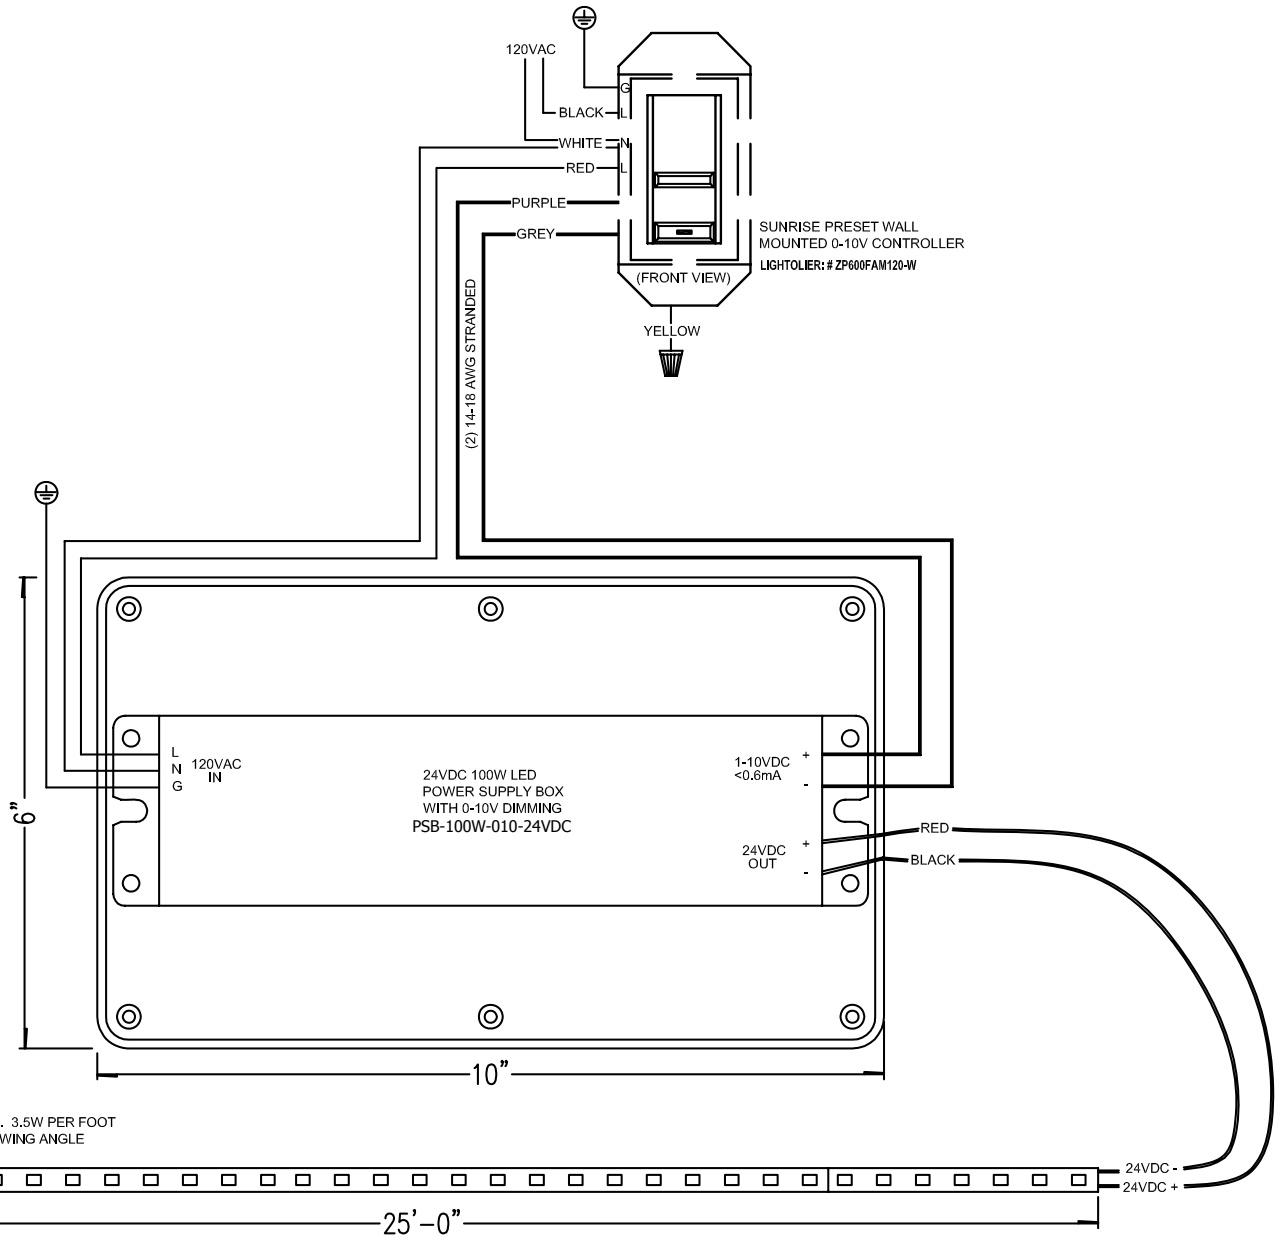

FLEXIBLE FIELD CUTTABLE LED STRIP. 3.5W PER FOOT  
25 FOOT STRIP WITH 140 DEGREE VIEWING ANGLE  
EDGE: # SS3-24V-25-WW

MAX RUN PER 100 WATT POWER SUPPLY IS 28'

PROJECT:

FIXTURE  
TYPE:

DATE: