




SUITE



WALL INDOOR/OUTDOOR

The Edge Lighting Wall Collection offers quality illumination and impeccable design with its wall sconces, vanity lights, picture lighting and LED reading lamps. Always clean in line, high in performance and ADA compliant, this collection offers a wide variety of design elements to compliment your decor.

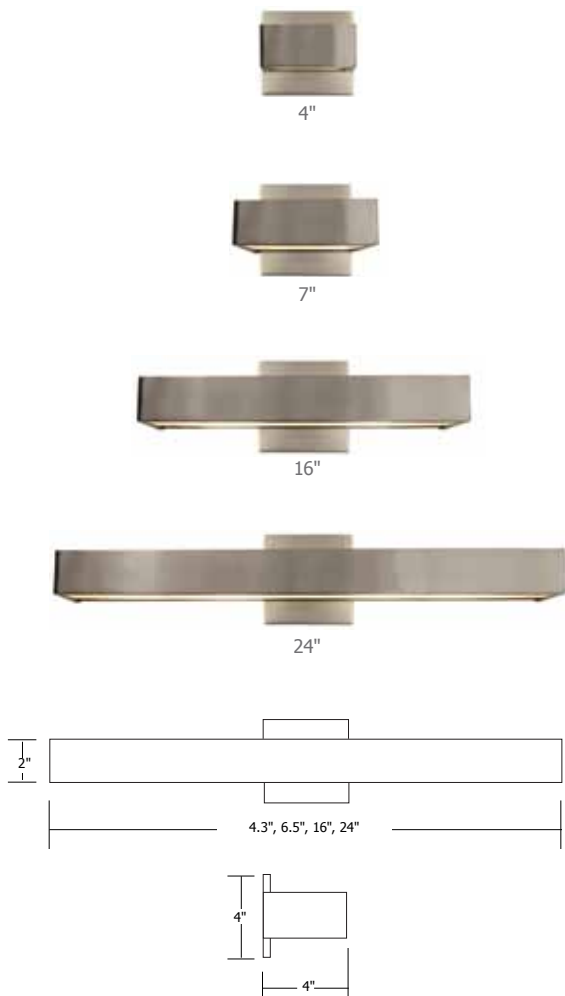

Alpha wall and vanity series features frosted glass diffusers on the top and the bottom of the rectangular metal shade providing general bidirectional light distribution. ADA compliant.


DIFFUSER	Frosted Glass	
BODY FINISH	Satin Nickel or Chrome	
LAMP SPECIFICATION	Halogen (H1): Included 4H1 - T4/G9/60W 7H1 - T3Short/RSC/100W 16H1 - 2xT3short/RSC/75W 24H1 - 3xT3Short/RSC/75W	Fluorescent (F1): Included 7F1 - T4/G24Q-1/13W 16F1 - T5/2G11/24W 24F1 - T5/2G11/40W
TOTAL WATTAGE	4H1 - 60W 7H1 - 100W 16H1 - 150W 24H1 - 225W	7F1 - 13W - 3500K 16F1 - 24W - 3500K 24F1 - 40W - 3500K
DIMMER	Halogen (H1) - Incandescent	Fluorescent (F1) - Electronic Ballast; Not dimmable

ORDERING CODE	ALPHA	SIZE	4	LAMP	H1	FINISH	SN	VOLTAGE	Standard 120V (leave blank)
		4	4"	H1	Halogen	SN	Satin Nickel	2	230V 50Hz
		7	7"	F1	Fluorescent	CH	Chrome	3	277V 60Hz (F1 only)
		16	16"		(7", 16", and 24" only)				
		24	24"						

REGAL 



Regal wall features white glass diffusers on the top and bottom of the curved metal shade providing general bidirectional light distribution. ADA compliant.

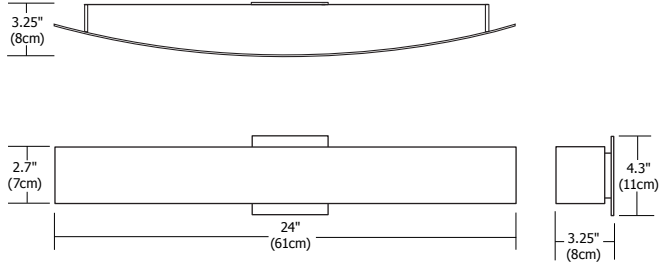


DIFFUSER	Frosted Glass	
BODY FINISH	Satin Nickel or Chrome	
LAMP SPECIFICATION	Halogen (H1): Included H1 - 2xT3SHORT/RSC/75W	Fluorescent (F1): Included F1 - T5/2G11/24W
TOTAL WATTAGE	H1 - 150W	F1 - 24W - 3500K
DIMMER	H1 - Incandescent	F1 - Electronic Ballast; not Dimmable

ORDERING CODE	REGAL	LAMP	FINISH	VOLTAGE
		H1	SN	Standard 120V (leave blank)
		H1 Halogen F1 Fluorescent	SN Satin Nickel CH Chrome	2 230V 50Hz 3 277V 60Hz (F1 only)



Wall


GARBO WALL 

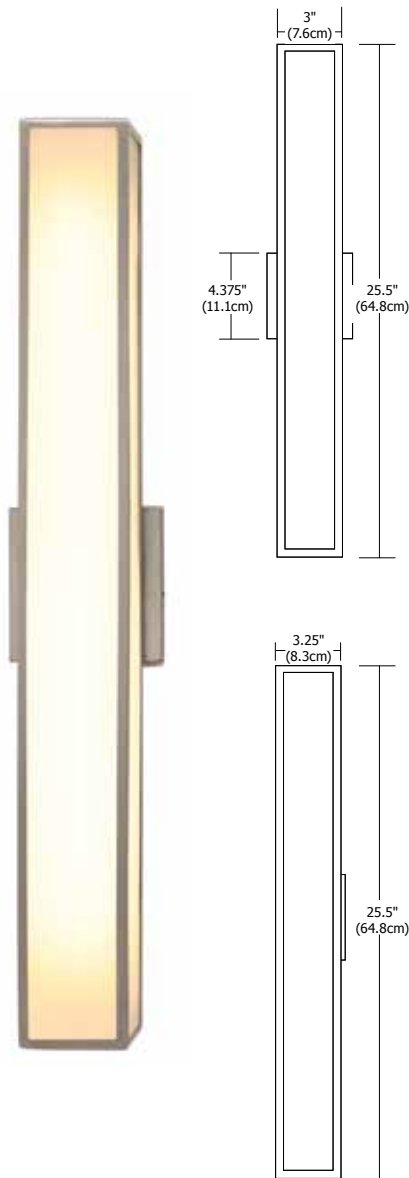

Garbo Wall features opal white acrylic diffusers in a slim rectangular metal frame providing general and vanity multidirectional light distribution. It mounts vertically or horizontally onto a wall and it is also available in dimmable version (F1D). For Ceiling/Wall square version see p. 124. ADA compliant.

DIFFUSER	Opal White Acrylic
BODY FINISH	Satin Nickel or Polished Nickel
LAMP SPECIFICATION	Fluorescent (F1 or F1D): Lamp Included 25F1/F1D - T8/FO17W
TOTAL WATTAGE	25F1/F1D - 17W - 3000K
DIMMER	Fluorescent (F1) - Electronic Ballast; Not dimmable Fluorescent (F1D) - Electronic Ballast; Dimmable* <i>*Lutron® dimmer required - Diva (DVF-103P) or Nova (NF-10) recommended. For additional dimmers visit www.lutron.com.</i>

ORDERING CODE	TYPE	SIZE	LAMP	FINISH	VOLTAGE
GARBO	W	25	F1	SN	Standard 120V (leave blank)
	W Wall	25 25.5"	F1 Fluorescent F1D Fluorescent Dimmable	SN Satin Nickel PN Polished Nickel	2 230V 50Hz 3 277V 60Hz (F1 only)

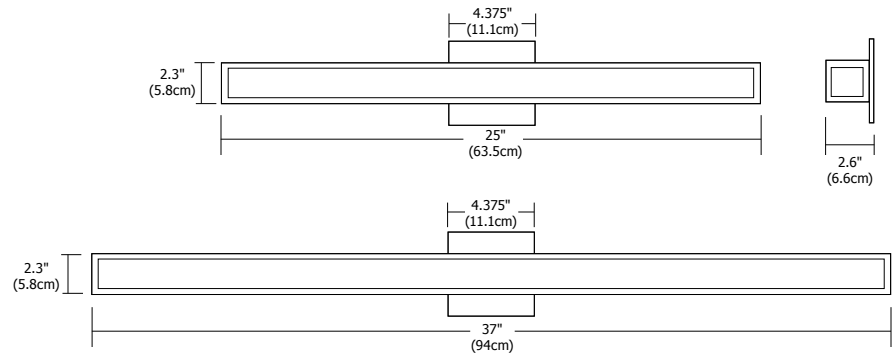

Wall

Greta wall and vanity series features white glass diffusers on all sides of the rectangular metal shade providing general multidirectional light distribution. ADA compliant.


DIFFUSER	Opal White Glass
BODY FINISH	Satin Nickel or Polished Nickel
LAMP SPECIFICATION	Halogen (H1): Lamp Included 25H1 - 5xKX40FR/E11/40W 37H1 - 8xKX40FR/E11/40W
TOTAL WATTAGE	25H1 - 200W 37H1 - 320W
DIMMER	Halogen (H1) - Incandescent

ORDERING CODE	GRETA	TYPE	SIZE	LAMP	FINISH	VOLTAGE
		W Wall	25 25" 25" 37" 37"	H1 Halogen	SN Satin Nickel PN Polished Nickel	2 230V 50Hz (leave blank)



The 4X4 wall sconce with inner white glass diffuser is available in halogen or **LED** version. Also suitable for ceiling applications, the fixture is rated for indoor, outdoor or wet locations. An electronic transformer/driver is provided which fits easily into the electrical box. ADA compliant. All **LED** fixtures include 5 year warranty.

DIFFUSER	White
BODY FINISH	Satin Aluminum
LAMP SPECIFICATION	Halogen (H1): Lamp Included 20 Watt G4 Base Bi-Pin
	LED (L1): Lamp Included 6.1 Total Watts, LED , 2871K, 82CRI, 150 lumens, 24 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	H1 - Electronic Low Voltage Dimmer
	L1 - Visit www.edglighting.com for updates

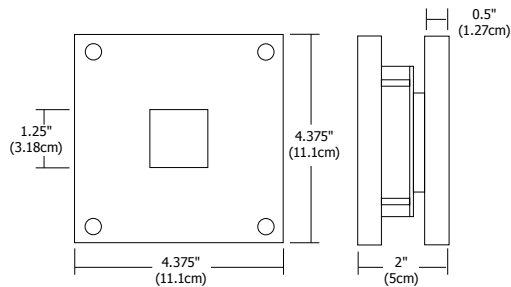

ORDERING CODE	LAMP	FINISH	VOLTAGE
4X4	H1	SA	Standard 120V (leave blank)
	H1 Halogen L1 LED	SA Satin Aluminum	2 230V 50Hz 3 277V 60Hz




MR. SQUARE 




Mr. Square includes white glass front and back diffusers to cast a glow on the wall. The fixture is rated for indoor, outdoor and wet applications. ADA compliant.

DIFFUSER	White/White
FINISH	Satin Aluminum
LAMP SPECIFICATION	Halogen (H1): Lamp Included 40 Watt G9 Base Line Voltage
DIMMING INFORMATION	Incandescent Dimmer

ORDERING CODE	MRSQ	DIFFUSER	LAMP	FINISH	VOLTAGE
		WW	H1	SA	Standard 120V (leave blank)
		WW White/White	H1 Halogen	SA Satin Aluminum	2 230V 50Hz

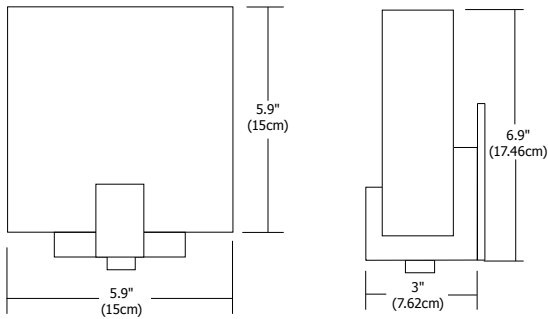

MICRO

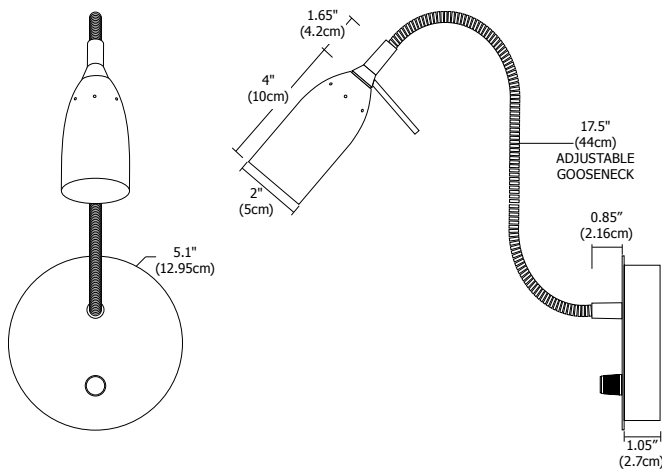

Micro Wall reading fixture features a conical shade and 17.5" goose neck arm for easy positioning. The base of the gooseneck arm must be twisted upward before positioning direction of light. The fixture canopy contains an on/off switch-dimmer for controlling the light.





FINISH	Satin Nickel
LAMP SPECIFICATION	Halogen (H1): Lamp Included 40 Watt G9 Base Line Voltage
DIMMING INFORMATION	Dimmer Included

ORDERING CODE	MICRO	LAMP	FINISH	VOLTAGE
		H1	SN	Standard 120V (leave blank)
		H1 Halogen	SN Satin Nickel	2 230V 50Hz



Wall

NIGHT OWL 1 WATT LED

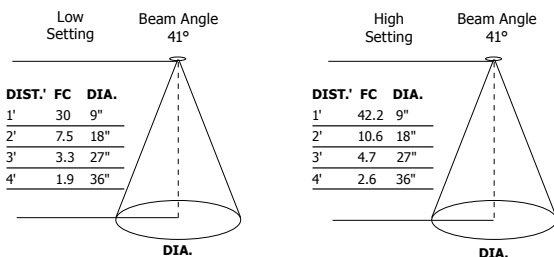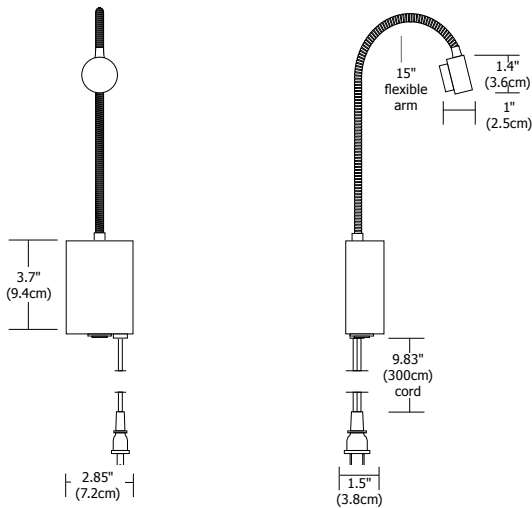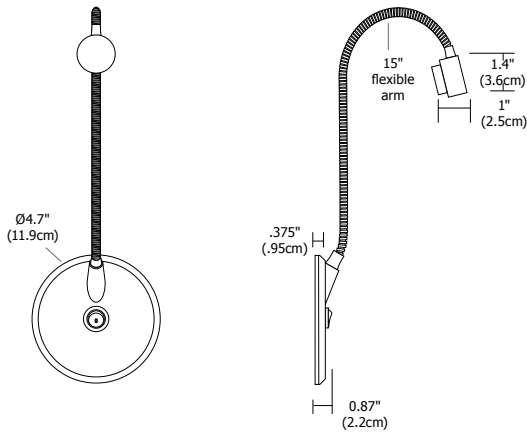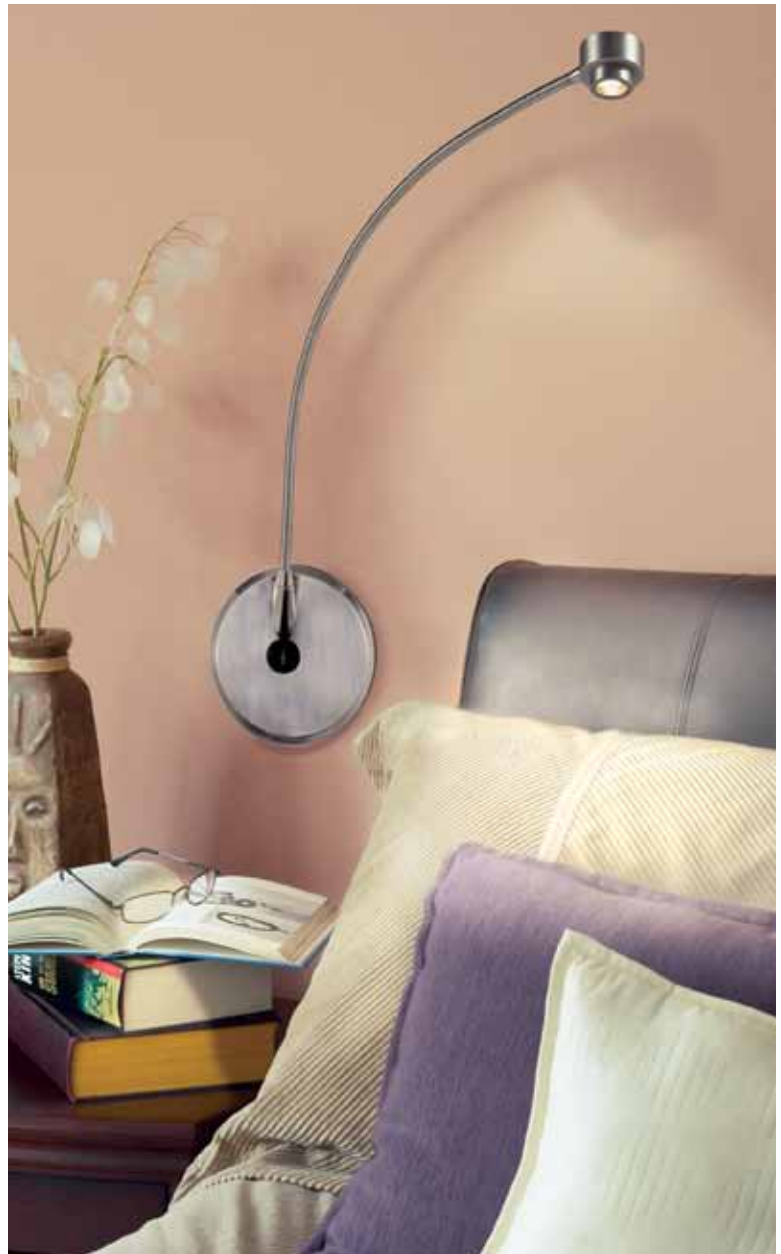

Ideal for late night reading, the **cool-to-the-touch** Night Owl features a 15" goose neck arm for easy positioning. The warm-white **LED** light is controlled by a high/low switch allowing more flexible lighting options. Available in plug-in and canopy versions, the fixture is rated for 100-240 VAC, 50/60 Hz and includes a 5 year warranty.





FINISH	Satin Nickel or Antique Bronze
LAMP SPECIFICATION	2 Total Watts, 12VAC LED , 3070K, 80CRI, 41 total lumens; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	Bi-Level light control with high (100%)/low (50%) switch
ACCESSORIES	Cord Cover COCV-5-WH , 40" self-sticking electrical wire cover 1/2" wide

ORDERING CODE **NIGHTOWL** - TYPE **P** - FINISH **SN**

P Pinup
C Canopy

SN Satin Nickel
BZ Antique Bronze

NIGHT OWL 3 WATT LED
 ADJUSTABLE LENS 10° - 30° BEAM SPREAD

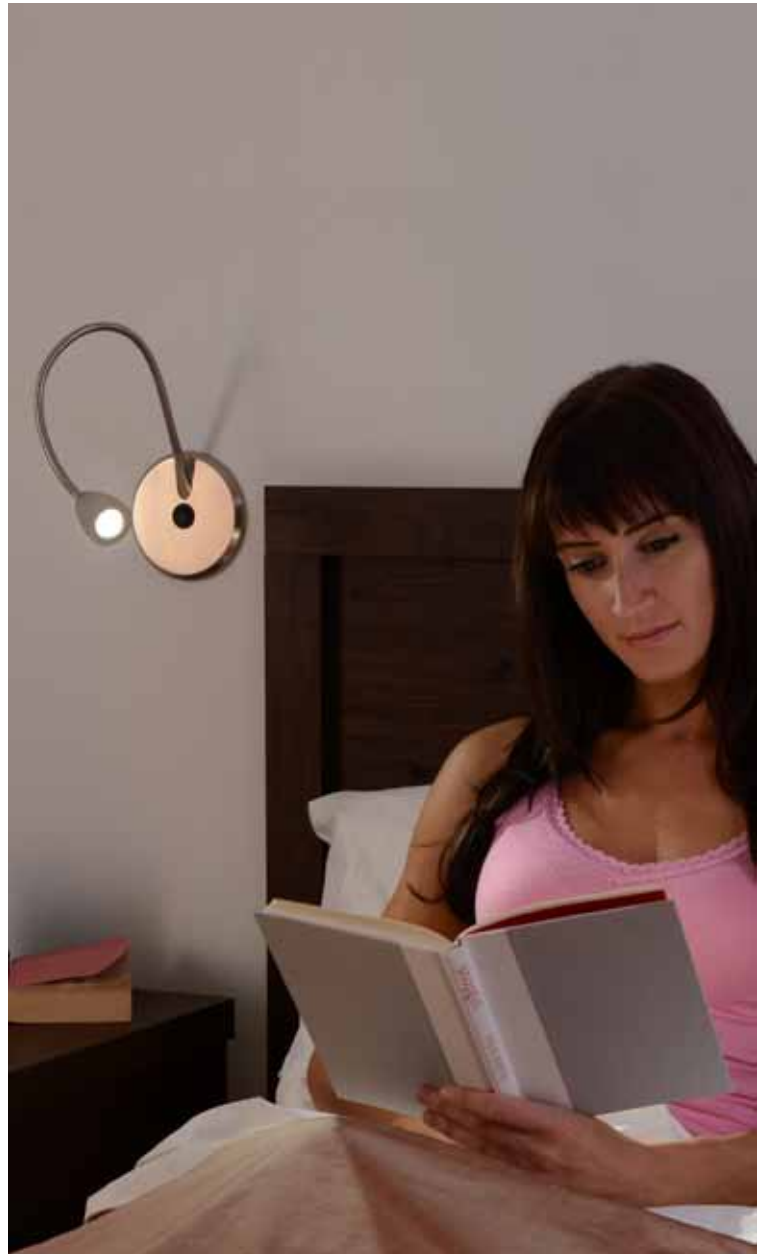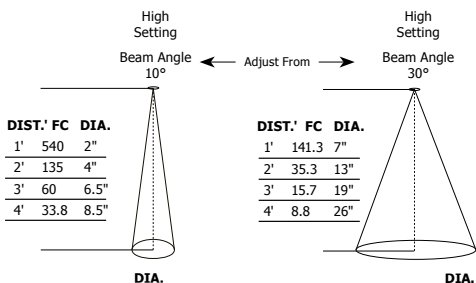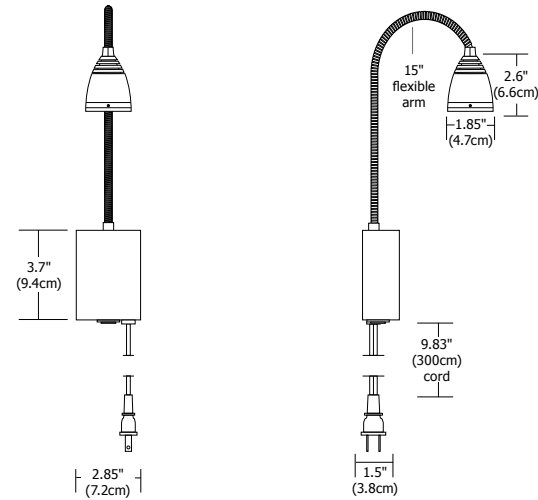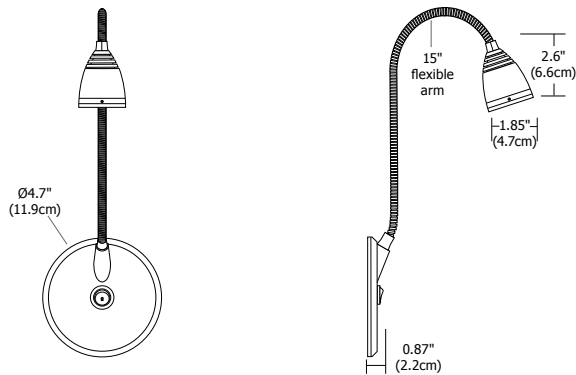



Wall

The Night Owl 3 features a rotating lens to modify the beam angle from 10 degrees to 30 degrees, as well as a high/low switch for bi-level light control. It is designed for those who enjoy reading late at night but do not want to disturb others. The 15" gooseneck arm allows the lamp to be easily positioned in any direction. Available in plug-in and canopy versions, the fixture is rated for 100-240 VAC, 50/60 Hz and includes a 5 year warranty.

FINISH	Satin Nickel, Antique Bronze, or White
LAMP SPECIFICATION	3.8 Total Watts, 12VAC LED , 3070K, 80 CRI, 55 total lumens (high setting); 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	Bi-Level light control with high (100%)/low (30%) switch
ACCESSORIES	Cord Cover COCV-5-WH , 40" self-sticking electrical wire cover 1/2" wide

ORDERING CODE	NIGHT3	FINISH	TYPE
		SN	Standard Canopy (leave blank)
		SN Satin Nickel BZ Antique Bronze WH White	P Plug In (120-240V) transformer with 10ft long cord

GALLERIA XENON

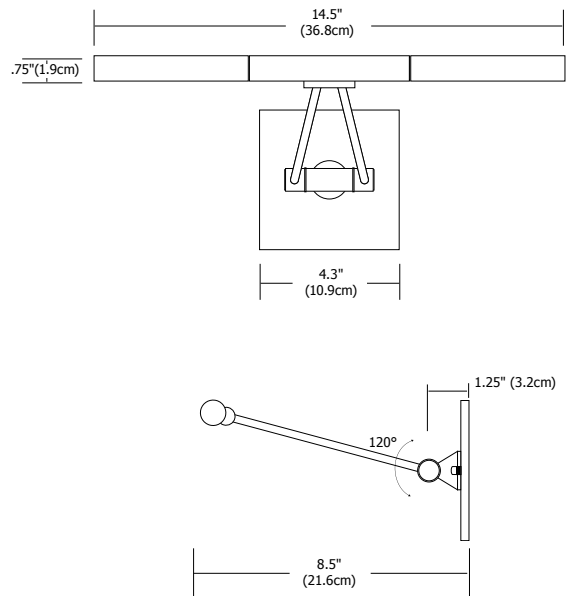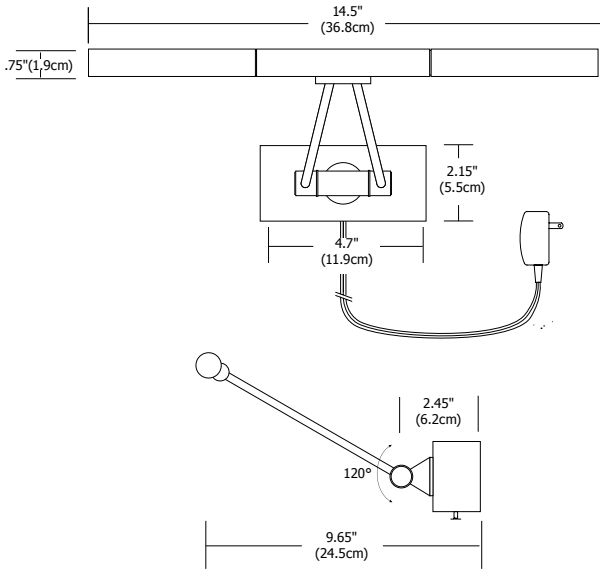

The Galleria picture light features a 120° adjustable arm for adjusting the light beam. The two 20 watt Xenon lamps are housed inside the cylindrical socket tubes, which rotate 180 degrees to control direction of the light. It is available in Canopy or Plug-In version with 8 ft cord and switch.

FINISH Satin Nickel

LAMP SPECIFICATION 40 Watt (2x20 Watt) Xenon G4 Base Bipin

DIMMING INFORMATION Low Voltage Electronic Dimmer




ACCESSORIES Cord Cover **COCV-5-WH**, 40" self-sticking electrical wire cover 1/2" wide.

ORDERING CODE	FIXTURE	TYPE	FINISH	VOLTAGE
GAL	GAL Galleria	PL Picture Light	SN Satin Nickel	Standard Canopy (leave blank) P Plug In

CODY LED PICTURE LIGHT



Cody 6 provides uniform illumination to frames from 8" W x 10" H to 24" W x 18" H
 Cody 12 provides uniform illumination to frames from 24" W x 32" H to 32" W x 32" H

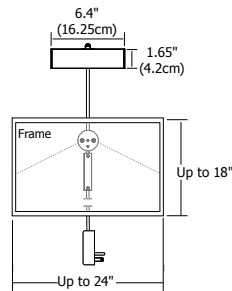
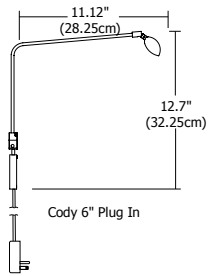



Wall

Cody, an elegant **LED** picture light, provides uniform warm white illumination. The high CRI light easily replaces a high wattage T-type incandescent or halogen MR16 without harmful IR, UV or mercury, while producing an average of 30 footcandles (see Web site for details). The fixture head has a 90° vertical adjustment range and is dimmable with an electronic low voltage dimmer. Cody's **LEDs** provide 50,000 hours or about 20 years of economic, maintenance-free light, when operated at 6 hours per day, resulting in a low cost of ownership. Fixture includes 5 year warranty.

FINISH	Satin Nickel, Antique Brass, Antique Bronze, Satin Brass or Black
LAMP SPECIFICATIONS	Cody 6: 8 Total Watts, 12VAC LED , 2911K, 80CRI, 165 lumens, 20 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation Cody 12: 16 Total Watts, 12VAC LED , 2911K, 80CRI, 330 lumens, 20 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	Low Voltage Electronic
ACCESSORIES	Cord Cover COCV-5-WH , 40" self-sticking electrical wire cover 1/2" wide.

ORDERING CODE	FIXTURE	SIZE	FINISH	VOLTAGE
CPL	Cody Picture Light	6 6.4" 12 12.4"	SN Satin Nickel BK Black SB Satin Brass BZ Antique Bronze AB Antique Brass	Standard Canopy (leave blank) 2 230V 50Hz P Plug In (120-12V) transformer with 10 ft long cord

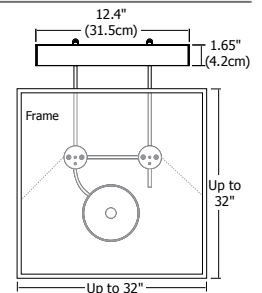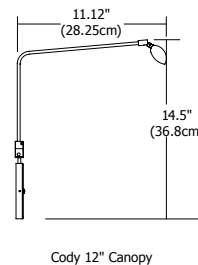

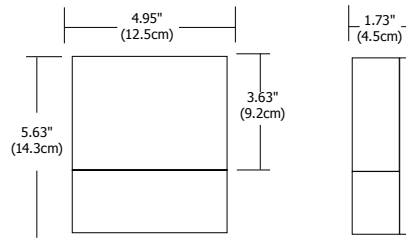

The geometric TV LED wall sconce provides intense light with warm white LEDs. Available with satin aluminum or white base, fixture features crystal diffuser. IP 65 rated for indoor and outdoor applications. ADA compliant. Fixture includes 5 year warranty.


FINISH	Satin Aluminum or White
LAMP SPECIFICATION	6.7 Total Watts, 12VAC LED, 2878K, 86CRI, 323 lumens, 48 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	Visit www.edgelighting.com for updates

ORDERING CODE	TV	W	L1	SA
	TV TV	W Wall	L1 LED	SA Satin Aluminum WH White

DIAL LED 
 INDOOR/OUTDOOR



Wall

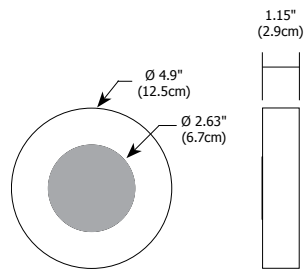


Dial **LED** wall light contains two recessed **LED** lamps that illuminate the central satin aluminum dial and half of the surrounding acrylic disc with warm white light. IP 65 rated for indoor and outdoor applications. ADA compliant. Fixture includes 5 year warranty.


FINISH	Satin Aluminum
LAMP SPECIFICATION	5.7 Total Watts, 12VAC LED , 3019K, 83CRI, 184 lumens, 32 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	Visit www.edgelighting.com for updates

ORDERING CODE	DIAL	W	L1	SA
	DIAL Dial	W Wall	L1 LED	SA Satin Aluminum

TAOS SQUARE LED 
INDOOR/OUTDOOR

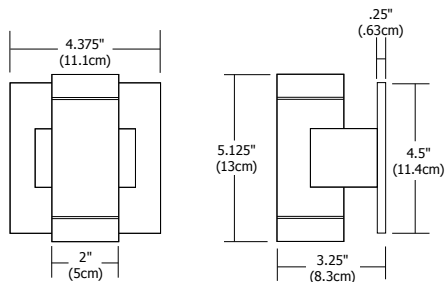

DIST. FC	DIA.
1'	450 2.5"
2'	120 5"
3'	54 7.5"
4'	30 9.5"
5'	19 14.5"

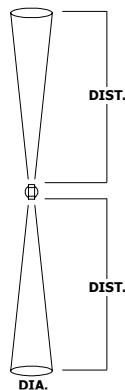

The sharp symmetric lines of the Taos Square **LED** add geometric style while providing intense bidirectional light above and below the fixture. An electronic 100-240 VAC, 50/60 Hz driver is provided which fits easily into the electrical box. The fixture is rated for indoor, outdoor and wet applications. ADA compliant. Fixture includes 5 year warranty.

FINISH Satin Aluminum

LAMP SPECIFICATION 6.52 Total Watts, 12VAC **LED**, 3182K, 84CRI, 158 lumens, 24 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation

DIMMING INFORMATION TAOS-W-SQ-LED-SA not dimmable
TAOS-W-SQ-010-SA dimmable with 0-10V dimmer

ORDERING CODE **TAOS** - **W** Wall - **SQ** Square - **LED** LED Dims with 0-10V Dimmer - **SA** Satin Aluminum

Lighting Facts® Label provides data for Taos Round, TAOS-W-RD-LED-SA, and Square, TAOS-W-SQ-LED-SA, fixtures






TAOS ROUND LED 
INDOOR/OUTDOOR



The cylindrical shape of the Taos Round **LED** adds balance to the environment while providing intense bidirectional light above and below the fixture. An electronic 100-240 VAC, 50/60 Hz driver is provided which fits easily into the electrical box. Taos is rated for indoor, outdoor and wet applications. ADA compliant. Fixture includes 5 year warranty.

FINISH	Satin Aluminum
LAMP SPECIFICATION	6.52 Total Watts, 12VAC LED , 3182K, 84CRI, 158 lumens, 24 lumens per watt; 70% lumen maintenance based on 50,000 hours of operation
DIMMING INFORMATION	TAOS-W-RD-LED-SA not dimmable TAOS-W-RD-010-SA dimmable with 0-10V dimmer


ORDERING CODE	TAOS	TYPE	SIZE	LAMP	FINISH
		W	RD	LED	SA
		W Wall	RD Round	LED 010 LED Dims with 0-10V Dimmer	SA Satin Aluminum

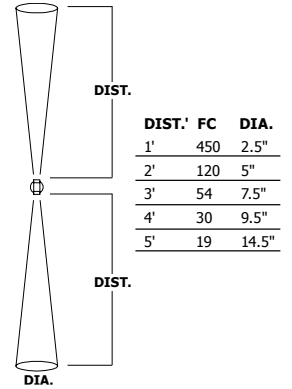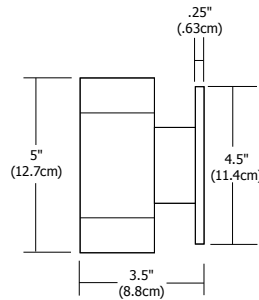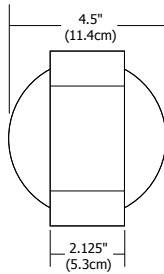

Wall



ALPINE HALOGEN
INDOOR/OUTDOOR

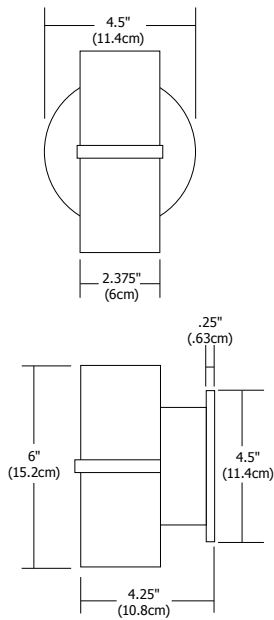

Wall

The geometric Alpine Wall provides bidirectional light above and below the fixture. The fixture is rated for indoor, outdoor and wet applications.

BODY FINISH Satin Aluminum

LAMP SPECIFICATION **HALOGEN (H1):** Lamp Included
H1 - 2xMR16/GU10/20W 120 volt

TOTAL WATTAGE H1 - 40W

DIMMING INFORMATION Incandescent

ORDERING CODE	ALP	TYPE	SIZE	LAMP	FINISH
	W	RD	H1	SA	
	W Wall	RD Round	H1 Halogen	SA Satin Aluminum	