




Compatible System Connectors



FJ-SCLP-12-SN
Satin Nickel



FJ-SCLP-12-BZ
Antique Bronze

FJ-SCLP-12-PN
Polished Nickel

Description

The Scope LED pendant, a classic contemporary cylinder fixture, features a rotating lens to modify the beam diameter from 20° spot to 50° flood 9 watt LED (equal to 41 watt halogen). The cool-to-touch lens allows adjustability while the fixture is lit. The fixture includes eight feet of field-cutttable coaxial cable.

System

Mounts to Monorail, Monorail 2 Circuit, any LED Fast Jack power canopy or LED track transformer (sold separately)

Body Finish

Satin Nickel, Polished Nickel or Antique Bronze

Lamp Specification

Integrated 9 watt 12VAC LED, 2,994K, 83CRI, approximately 315 lumens, 70% lumen maintenance based on 50,000 hours of operation

Dimming Information

For up-to-date dimming information, visit www.edgelighting.com

Weight

1 lb (.45 kg)

Edge Lighting

lighting facts^{CM}
A Program of the U.S. DOE

Light Output (Lumens)	315
Watts	9.3
Lumens per Watt (Efficacy)	33
Color Accuracy Color Rendering Index (CRI)	83
Light Color Correlated Color Temperature (CCT)	2994 (Warm White)
2700K 3000K 4500K 6500K	

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results. Products qualified under the DOE ENERGY STAR® program have the ENERGY STAR mark on this label.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WS46-NM.D7W
Model Number: FJ-SCO-X-XX
Type: Other



FJ Fast Jack
M Monorail
M2 Monorail 2 Circuit

SCLP Scope LED Pendant

12 12VAC


SN Satin Nickel
PN Polished Nickel
BZ Antique Bronze

Compatible System Connectors



Adjust Beam by turning LED Lens

D - Distance from SCOPE LED fixture
FC - Initial footcandles at the center of beam
DIA - Diameter

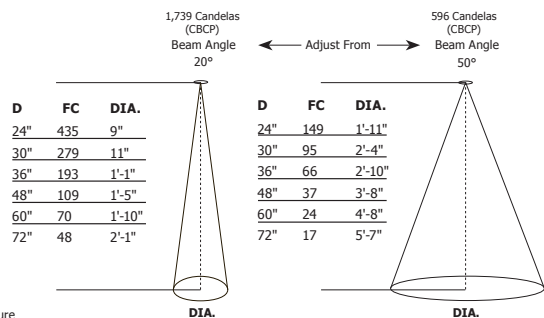

PROJECT:

FIXTURE TYPE:

DATE: