

3 and 4 Port Round Canopy

12" Round 3 & 4 Port Fast Jack Canopy

The 12" round canopies contain 3 or 4 Fast Jack Ports and mount to a standard 4" electrical box with plaster ring or an octagon box. The halogen version accepts maximum of 75 watt 12 volt load per port, total of 225 watts (3-Port) or 300 watts (4-Port). The **LED** version accepts maximum of 60 watt 12 volt load per port, total of 180 watts (3-Port) or 240 watts (4-Port). Dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.


Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

4 lb (1.8 kg)

System	Canopy	Type	Ports	Finish	Voltage Input
FJP	12RD	Halogen (leave blank)	3	SN	Standard 120V (leave blank)
FJP Fast Jack Power Feed	12RD 12" Round Canopy	LED LED	3 3 Ports 4 4 Ports	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230V 50Hz 3 277V 60Hz (Halogen only)

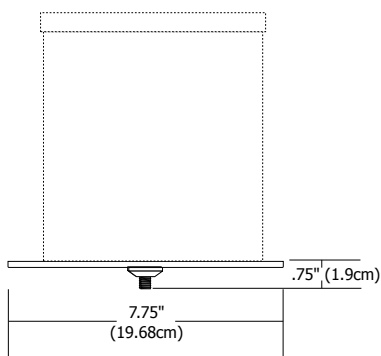

7" Round Recessed Fast Jack Canopy

The 7" Round Recessed Fast Jack Canopy retrofits an existing 6" - 6 1/2" downlight, converting it to a mono-point canopy. The 75 watt electronic transformer (included) or 60 watt LED power supply discreetly fits above canopy. Dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.

General Requirements:

The recessed can transformer is compatible with: Juno IC2, TC2, and TC2R; HALO H7T and H7RT; Cooper Lighting H27RT; Capri (Thomas) Lighting PR75ASIC/TPR75ASIC/DY6431; Progress Lighting P7TG, P8TG, and PIO8-TG cans. Edge Lighting is not affiliated with nor endorsed by any of the companies listed above.

Finish:

White

Weight:

2 lb (.9 kg)

System	Canopy	Type	Finish	Voltage Input
FJP	RC	Halogen (leave blank)	WH	Standard 120V (leave blank)
FJP Fast Jack Power Feed	RC Recessed Can	LED LED	WH White	2 230V 50Hz 3 277V 60Hz (Halogen only)

Compatible Accessories or Finished Items:
All Fast Jack fixtures (sold separately).

PROJECT:

FIXTURE
TYPE:

DATE: