


2" Square Fast Jack Power Canopy

The 2" Square Fast Jack Canopy mounts to a 2" electrical box (included) that houses either a 75 watt 12 volt electronic transformer (included) or 60 watt 12 volt LED power supply (included). Halogen version is dimmable with low voltage electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.

Weight:
1.35 lb (.61 kg)

System	Canopy	Type	Finish	Voltage Input
FJP	2SQ	Halogen (leave blank)	SN	Standard 120V (leave blank)
<small>FJP Fast Jack Power Feed</small>	<small>2SQ 2.78" Square</small>	<small>LED LED</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze WH White</small>	<small>2 230V 50Hz 3 277V 60Hz (Halogen only)</small>

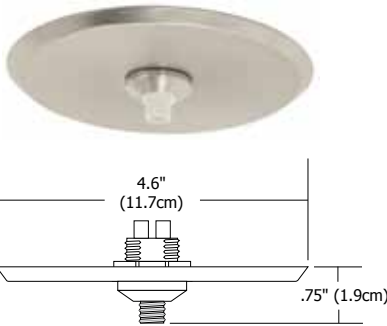


4" Round Fast Jack Power Canopy

The 4" Round Fast Jack Canopy mounts to a standard 4" electrical box that houses either a 75 watt 12 volt electronic transformer (included) or 60 watt 12 volt LED power supply (included). Halogen version is dimmable with low voltage electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.

Weight:
.95 lb (.43 kg)

System	Canopy	Type	Finish	Voltage Input
FJP	4RD	Halogen (leave blank)	SN	Standard 120V (leave blank)
<small>FJP Fast Jack Power Feed</small>	<small>4RD 4.6" Round</small>	<small>LED LED</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze WH White</small>	<small>2 230V 50Hz 3 277V 60Hz (Halogen only)</small>

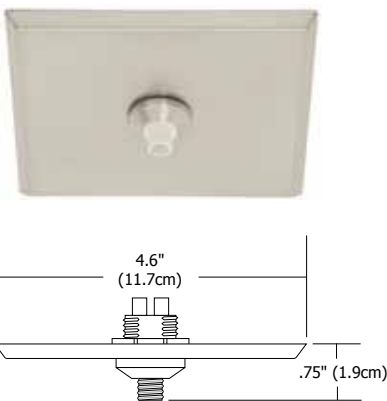

4" Square Fast Jack Power Canopy

The 4" Square Fast Jack canopy mounts to a standard electrical box that houses either a 75 watt 12 volt electronic transformer (included) or 60 watt 12 volt LED power supply (included). Halogen version is dimmable with low voltage electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.

Weight:
.95 lb (.43 kg)

System	Canopy	Type	Finish	Voltage Input
FJP	4SQ	Halogen (leave blank)	SN	Standard 120V (leave blank)
<small>FJP Fast Jack Power Feed</small>	<small>4SQ 4.6" Square</small>	<small>LED LED</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze WH White</small>	<small>2 230V 50Hz 3 277V 60Hz (Halogen only)</small>

PROJECT:

FIXTURE
TYPE:

DATE: